


UN-254

Automatic double needle belt loop setter

UNIQUE

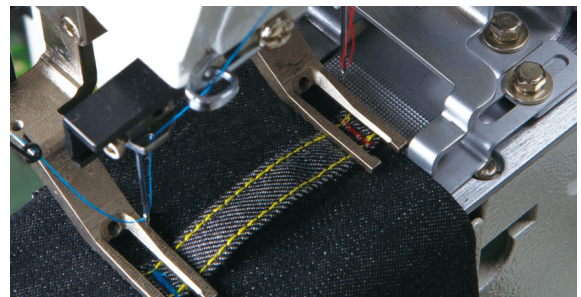

■ Features

- The processes of automatic screening, cutting, folding and tacking are completed at one time.
- Automatically detect and filter out the waste at the trouser flap joint and automatically cut off.
- By adjusting the data of needle gauge, the length of the belt loop, the position of the bartack seam, and the waste detection, it can automatically complete the adjustment of the length of the belt loop, without the need for mechanical parts adjustment.
- Adjust the X or Y direction parameters to complete the adjustment of the width of the belt loop.
- The operation is easy to learn and saves time and effort.

■ Technical Specification

Model	UN-254
Max. speed	2700sti/min
Needle type	DP×17 #19-#21
Shuttle hook type	Half rotate 2 times capacity
Bartack stitch width	1.0~3.5mm
Bartack stitch length	5.0~22mm
Needle gauge	1/8 inch (3.2mm)-3/8 inch (10mm)
Loop width	7~20mm
Loop length	45~75mm after attached
Power	550W
Air consumption	0.5Mpa 1.8L/Min
G/N weight	287/230 kgs
Packing size	130*95*150cm=1.853 CBM

■ Productivity

6 loops 180 pants/ hour

5 loops 216 pants/ hour